



Table Of Contents

Hubbell Products	7
Cooper Components	8
Gaskets	16
Extrusions	17
Recloser Parts	19
Regulator Parts	27
Substation Parts	31
Mineral Oil & FR3 Fluid	37





Single & Three Phase Transformers

Hubbell Power Systems

Cooper Components

Gaskets & Extrusions




FGS
AN EIS COMPANY

Normal Duty



Part #	Description
217255-7333	6 KV ND Arrester
217258-7333	9 KV ND Arrester
217259-7324	10 KV ND Recloser Arrester
217259-7333	10 KV ND Arrester
217560-7333	12 KV ND Arrester

Heavy Duty

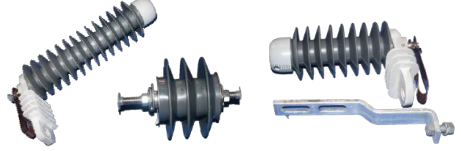

Part #	Description
213703-7202	3 KV HD Reg Arrester
213703-7333	3 KV HD Polemount Arrester
213709-7313	10 KV HD Recloser Arrester
213709-7333	10 KV HD Arrester w/Brackets
213709-8780	10 KV HD Arrester
213710-8939	12 KV HD Arrester
213715-7313	18 KV HD Recloser Arrester
213715-7324	18 KV HD Recloser Arrester
213715-7333	18 KV HD Arrester Optima Polemount
213265-7333	18 KV HD Arrester
213717-7333	21 KV HD Arrester
213722-7313	27 KV HD Recloser Arrester
213729-7333	36 KV HD Arrester

Station Class



Part #	Description
EVP0003003001	3 KV Station Class Arrester
EVP0005003001	6 KV Station Class Arrester
EVP0008003001	9 KV Station Class Arrester
EVP0009003001	10 KV Station Class Arrester
EVP0010003001	12 KV Station Class Arrester
EVP0013003001	15 KV Station Class Arrester
EVP0017003001	21 KV Station Class Arrester
EVP0022003001	27 KV Station Class Arrester
EVP0024003001	30 KV Station Class Arrester
EVP0029003001	36 KV Station Class Arrester
EVP0039003001	48 KV Station Class Arrester
EVP0042003001	54 KV Station Class Arrester
EVP0048003001	60 KV Station Class Arrester
EVP0057003001	72 KV Station Class Arrester



Part #2738743001
Flipper Fuse Kit



Part #92539-4002
Arrester Washer



Part #235DBIAP
35 KV Bushing Insert
200AMP



Part #235DE65TAR
35 KV Elbow
200AMP



Part #215BICM
15 KV Insert



Part#225BICM
25 KV Insert



Part #2237947A07H
Hardware Kit for 150 AMP
1-Phase Dual Voltage
Switch w/3" Hotstick



Part #2237947A08H
Hardware Kit for 150 AMP
1-Phase Dual Voltage
Switch Lever Handle



Part #2237947A10H
Hardware Kit for 150 AMP
3-Phase Tap Changer
Switch w/1.62" Hotstick
5 POS Index Plate A-E



Part #2237947A12H
Hardware Kit for 150 AMP
3-Phase Tap Changer
Switch w/1.62" Hotstick
5 POS Index Plate A-E



Part #2237947A14H
Hardware Kit for 100 AMP
1, 2 and 3 Phase Tap Changer
Cap/Wrench Handle



Part #2237947A17H
Hardware Kit for 300 AMP
1, 2 and 3 Phase Tap Changer
Lever Handle 5"



Part #2237947A18H
Hardware Kit for 300 AMP
1, 2 and 3 Phase Tap Changer
Lever Handle 5" Hotstick



Part #2237947A23H
Hardware Kit for 300 AMP
2 and 3 Phase Tap Changer
Lever Handle 5"



Part #2237947A39H
Hardware Kit for 100 AMP
1-Phase Tap Changer Switch
w/2.25" Lever



Part #2237947A40H
Hardware Kit for 50 AMP
Dual Voltage Switch
Cap/Wrench Handle



Part #2237947A66H
Hardware Kit for 50 AMP
3-Phase Tap Changer



Part #2237947A68H
Hardware Kit for 150 AMP
1-Phase Tap Changer Switch
W/T - Handle 5 POS Index
Plate A-E



Part #2237947A73H
Hardware Kit for 150 AMP
1-Phase Tri-Voltage Switch
W/T - Handle



Part #2237947A126H
Hardware Kit for 50 AMP
Dual Voltage Switch
Thermoplastic Lever Handle
Hotstick Handle



Part #2237947A160H
Hardware Kit for 50 AMP
1-Phase Dual Voltage



Part #2237947A195H
Hardware Kit for 100 AMP
1, 2 and 3 Phase Tap Changer
Padlockable Flexible
Hookstick Handle



Part #2237947A04H
Hardware Kit for 150 AMP
3-Phase Dual Voltage Switch
with 3" Hotstick



Part #2237947A05H
Hardware Kit for 150 AMP
3-Phase Dual Voltage Switch
with 3" Hotstick



Part #2237947A02H
Hardware Kit for 150 AMP
1-Phase Dual Voltage
Switch with Cap



Part #2237947A06H
Hardware Kit for 150 AMP
1-Phase Dual Voltage Switch
w/3" Hotstick




Part #2237947A301H
Hardware Kit for 100 AMP
1, 2 and 3 Phase Tap Changer
One Piece Rigid Padlockable
Hotstick Handle




Part # 2237947A302H
Hardware Kit for 100 AMP
1, 2 and 3 Phase Tap Changer
One Piece Rigid Padlockable
Hotstick Handle 1-5




Part #2237179C01M
300 AMP
1-Phase Tap Changer



Part #2237179C02M
300 AMP
3-Phase Tap Changer
3 Deck




Part #LS2R338H3N2A
35 KV
3-Phase Tap Changer
2 Position Switch




Part #LS4RH3T12M
3-Phase Tap Changer
4 Position Switch



Part #2237500C30
3-Phase Mini Changer,
100 AMP
Contact (6) 90 DG Bolt Tab



Part #2237500C31
3-Phase Mini Tap Changer,
100 AMP, Bolt Tab



Part #2237265C01M
3-Phase Dual Voltage
150 AMP Switch T or Hotstick
Operable Bolt Tabs



Part #2237403B01M
3-Phase Dual Voltage 150 AMP
Switch T or Hotstick Operable
Contact (6) (4) Bolt Tab



Part #2237500C33
3-Phase Mini Tap Changer,
100 AMP Switch
Contact (6) 10-12AWG



Part #2237500C35
3-Phase Mini Tap Changer
100 AMP Switch
Contact (6) 45DG Bolt Tap



Part #2238277C01M
3-Phase Tap Changer



Part #2237501C01
1-Phase Dual Voltage
50 AMP Switch
Bolt Tabs 90 Bend

Part #2237471C01M
3-Phase Tap Changer
150 AMP Switch
Hotstick Operable
Contact (6) 1 Bolt Tab

Part #2237471C16M
3-Phase Tap Changer
150 AMP Switch
Hotstick Operable
Contact (6) BT w/ Stud





Part #2237501C13
1-Phase Dual Voltage
50 AMP Switch
Contact 90 DG BT/
14-16AWG



Part #2237470C01M
1-Phase Tap Changer
150 AMP Switch
Hotstick Operable
Contact (6) Bolt Tab



Part #2237501C14
1-Phase Dual Voltage
50 AMP Switch
Contact 90 DG BT/10-
12AWG



Part #2237500C01
1-Phase Tap Changer
100 AMP Switch
Without Terminal Post
Contact (6) Bolt Tab



Part #2237500C03
1-Phase Tap Changer
100 AMP Switch
Without Terminal Post
Contact (6) 10-12AWG



Part #2237500C06
1-Phase Tap Changer
100 AMP Switch
with Terminal Post
Contact (6) Bolt Tab



Part #2237500C08
1-Phase Tap Changer
100 AMP Switch
with Terminal Post Contact
(6) 10-12AWG



Part #2237500C02
1-Phase Tap Changer
100 AMP Switch
Without Terminal Post
Contact (6) 16-14 AWG

Part #2237262C01M
1-Phase Dual Voltage
150 AMP Switch
T or Hotstick
Operable Bolt Tabs



Part #2237434C01M
1-Phase Dual Voltage
150 AMP Switch
Lever or Cap Operable
Contact: (6) Bolt Tab



Part #2237434C03M
1-Phase Dual Voltage
150 AMP Switch
Lever or Cap Operable
Contact (6) 10-12AWG



Part #2237434C52M
1-Phase Dual Voltage
150 AMP Switch
Lever or Cap Handle
#14-16 Wir



Part #2237434C53M
1-Phase Dual Voltage
150 AMP Switch
Lever or Cap Operable
Contact (8) 10-12AWG

Part #2237435C03M
1-Phase Dual Voltage
150 AMP Switch
Lever or Cap Operable
Contact (6) (4) 10-12AWG



Part #AZU100L009
9KV Under Oil Arrester
w/Lead and Hanger



Part #ASZH480C201
MOV Stormtrapper Arr 480
Volts w/Hanger



Part #2690286D06
5/8" - 11 Spade Internal
600A - 1400A



Part #2690286D07
TRI-Clamp
Low Voltage Bushing
1-14 Unplated Cu Stud/Spad
Standard Thread Length
1050 AMPS Rms
Bushing to Fit 1.875"
Diameter Hole

Current Sensing Fuses



Description	Part #
6AMP	#4000353C04M
10AMP	#4000353C06M
15AMP	#4000353C08M
25AMP	#4000353C10M
40AMP	#4000353C12M
65AMP	#4000353C14M
100AMP	#4000353C16M
140AMP	#4000353C17M



Part #4000715B02M
Inner Holder Only

Part #4001030B52M
Inner Hold & Fuse Cartridge

Bayonet Fuse Cartridge




Part #4000358C16CB
Dual Sensing 100AMP

Part #4000358C18CB
Dual Sensing 140AMP



Part #4001686A53M
Fuse Cartridge with End Plug

Dual Sensing Fuses



Description	Part #
3AMP	#4000358C03M
8AMP	#4000358C05M
15AMP	#4000358C08M
25AMP	#4000358C10M
450AMP	#4000358C12M
65AMP	#4000358C14M



Part #600-0093
Bushing Well
Ship Cap

Isolation Links



Part #3001861A01M



Part #3001861A02M



Part #3001861A03M



Part #3001861A05M



Part #3001861A06M



Part #3001861A07M



Part #2690130D10
12 Hole Spade
w/4 Hole Internal Spade Copper


Part #2690131D04
12 Hole Spade
w/4 Hole Internal Spade Aluminum

Part #2690225D10
6 Hole Spade
w/2 Hole Internal Spade Cooper

Part #2690225D12
Low Voltage J-Spade Bushing
Externally Clamped 2.20 Diameter
.56 Holes Tin Plated Copper


Part #2690225D16
12 Hole Spade
w/2 Hole Internal Spade

Dual Element



Description	Part #
8AMP	#4038108C05M
12AMP	#4038108C06M
15AMP	#4038108C07M
25AMP	#4038108C09M

Over Load Fuse




Description	Part #
65AMP	#4038361C03CB
100AMP	#4038361C04CB
125AMP	#4038361C05CB
Over Load/ Shorting Bar	#4038361C10CB

Shipping Caps



Part #300-0079
15KVA - Red

Part #2637269B04
25KVA - Blue



A. Part #2637700B01
Dust Cap for 600 AMP 35KV
Dead Break Bushing

B. Part # 2637700B02
Shipping Cap for 600 AMP
Dead Break Bushing

Part #2638372C01
200 AMP
15, 25 and 28KV
Plastic Bushing Well Fixed
Stud 2.50"



Part #2638372C02R
15/25KV HTN
Bushing Well
w/Removable Stud
2.0 Diameter
Externally Clamped

35KV Class Tri-Clamp Bushing Well

Part #BW150F
W/Fixed Stud Bushing
to Fit 2.56" Dia Hole



Part #BW150R
W/Removable Stud
Bushing to Fit 2.56" Dia Hole

Part #2603973B01
15/25 KV 200 AMP
Epoxy Bushing
Well 2.25"



Part #2603973B02T
15/25/28 KV 200 AMP
Epoxy Bushing
Well 2.25"

Bushing Well Insert

A. Part #LBI215TP
8.3/14.4KV
200 AMP 15KV



B. Part #LBI225TP
15.2/26.3KV
200 AMP



Part #LF1215
15KV Feed
Thru Insert



Part #LF1225
25KV Feed
Thru Insert




Part #2637459C01
35KV Deadbreak Bushing
600AMP Copper
Short Shank w/o Stud
Externally Clamped



Part #2637019B04
15/25KV Deadbreak
Bushing 600AMP
Copper Short
Shank w/o Stud



Part #4004352B02
Drip Guard Black



Part #3409661C07M
Fuse Holder
Parallel Fuses
Large Diameter




Part #2605670A02M
Silicone Grease 5.2 oz




Part #LE225CC06T
25KV 200AMP Elbow
1/0-2/0




Part #	Description
Part #3238018C09M	M.O.V.E. Deadfront 9KV Arrester Elbow 15KV Class 8.3/14.4KV Interface
Part #3238018C10M	M.O.V.E. Deadfront 10KV Arrester Elbow 15KV Class 8.3/14.4KV Interface
Part #3238018C10M	M.O.V.E. Deadfront 10KV Arrester Elbow 15KV Class 8.3/14.4KV Interface
Part #3238018C18M	M.O.V.E. Deadfront 18KV Arrester Elbow 15KV Class 8.3/14.4KV Interface




Part #354508M51M
23KV ELS P CL Backup Fuse
80 AMP 50KA SYM I.C.



Part #3544125M71M
15.5KV ELS P CL Backup Fuse
125AMP 50KA SYM I.C.



Part #3564012M11M
15.5KV ELX Current Limiting Fuse
12AMP 50 KA SYM I.C.
Mounting Code 5



Part #3564018M11M
15.5KV ELX Current Limiting Fuse
18bAMP 50KA SYM I.C.
Mounting Code 5



Part #4000361C99MC
Flapper Sidewall Mount



Part #4001177B53MC
Cover Mount Long



Part #4000361C99FV
w/Flapper Valve



Part #4038804B03M
Housing Inner Holder w/Flapper
Sidewall (Expulsion)
w/o Cartridge 150KV BIL



Part #4000361C89FV
Fuseholder w/Flapper Valve ASY
Sidewall (Expulsion) 150KV BIL




Part #AH46A1
Arrester Bracket 15/18KV




Part #AM21A1
Flipper Fuse Cutout Kit



Part #2005835A04
4 Hole Clamp
3.25" Hole Spacing



Part #2606722A01
4 Hole Clamp
2.75" Hole Spacing



Part #2606822A02
4 Hole Clamp
2.75" with Two Bail Tabs




Part #2606823A02
4 Hole Clamp
3.25" C-C




Part #2085399A01
3 Hole Clamp with Flange



Part #2085399A06
3 Stud Bushing Clamp



Part #2625031B01
4 Hole Bushing Clamp



Part #2637023B01
Bushing Clamp 600 AMP
15KV 3.5" C-C




A.



B.




C.




D.




E.



F.




G.



H.




I.



J.

Part #	Description
A. #UNS06040A1A1C1C	UltraSIL Housed VariStar, Normal Duty MOV Arrester 6KV
B. #UHS09050A1C1C1C	UltraSIL Housed VariStar, Heavy Duty MOV Arrester 9KV 7.65 MCOV
C. #UNS03030C0B0A1	UltraSIL Housed VariStar, Normal Duty MOV Arrester 3KV 2.55 MCO
D. #UNS10050A1C1C1C	UltraSIL Housed VariStar, Normal Duty MOV Arrester 10KV 8.4 MCOV
E. #UHS10050A1C1C1C	UltraSIL Housed VariStar, Heavy Duty MOV Arrester 10KV 8.4 MCOV
F. #UHS18080A1C1C1C	UltraSIL Housed VariStar Heavy Duty MOV Arrester 18KV 15.3 MCOV
G. #URT18080A1C1C1C	UltraSIL Housed URT HD/RP MOV Arrester 18KV 15.3 MCOV
H. #URT10050A1C1C1C	UltraSIL Housed URT HD/RP MOV Arrester 10KV 8.4 MCOV
I. #URT03040C0B0A1A	UltraSIL Housed URT Heavy Duty 3KV Regulator Assester
J. #UHS21090A1C1C1A	21KV Heavy Duty Lighting Arrester



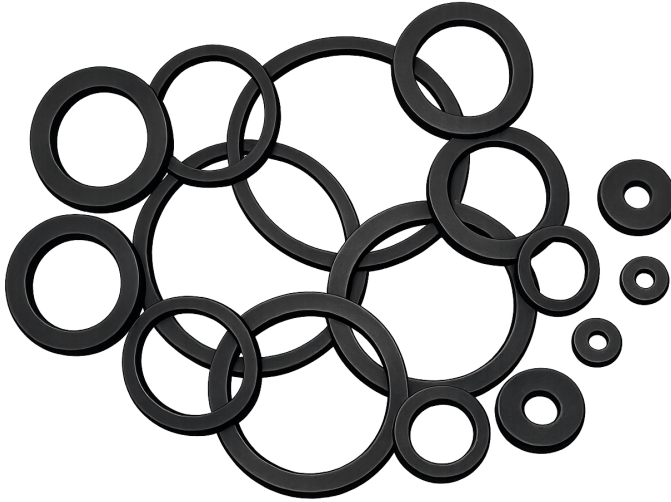

Gaskets

Part #	Description
#G-068037025	11/16" x 3/8" x 1/4"
#G-087037012	7/8" x 3/8" x 1/8"
#G-093050031	15/16" x 1/2" x 5/16"
#G-100037012	1" x 3/8" x 1/8"
#G-100050012	1" x 1/2" x 1/8"
#G-131100012	1 15/16" x 1" x 1/8"
#G-137062012	1 3/8" x 5/8" x 1/8"
#G-137075018	1 3/8" x 3/4" x 3/16"
#G-162062012	1 5/8" x 5/8" x 1/8"

Part #	Description
#G-237175018	2 3/8" x 1 3/4" x 3/16"
#G-250175012	2 1/2" x 1 3/4" x 1/8"
#G-250200025	2 1/2" x 2" x 1/4"
#G-275175012	2 3/4" x 1 3/4" x 1/8"
#G-275215018	2 3/4" x 2 5/32" x 3/16"
#G-287225012	2 7/8" x 2 1/4" x 1/8"
#G-300250025	3" x 2 1/2" x 1/4"
#G-200137012	3 1/8" x 2 3/16" x 1/8"
#G-312218018	3 1/8" x 2 3/16" x 3/16"

Gaskets

Part #	Description
#G-162087018	1 5/8" x 7/8" x 3/16"
#G-162106018	1 5/8" x 1 1/16" x 3/16"
#G-168137012	1 5/8" x 1 3/8" x 1/8"
#G-175100018	1 3/4" x 1" x 3/16"
#G-175131012	1 3/4" x 1 5/16" x 1/8"
#G-187062012	1 7/8" x 5/8" x 1/8"
#G-187137012	1 7/8" x 1 3/8" x 1/8"
#G-200137012	2" x 1 3/8" x 1/8"
#G-225150012	2 1/4" x 1 1/2" x 1/8"

Part #	Description
#G-312237025	3 1/8" x 2 3/8" x 1/4"
#G-325250025	3 1/4" x 2 1/2" x 1/4"
#G-350262018	3 1/2" x 2 5/8" x 3/16"
#G-350300025	3 1/2" x 3" x 1/4"
#G-362275018	3 5/8" x 2 3/4" x 3/16"
#G-387362018	3 7/8" x 3 5/8" x 3/16"
#G-400350025	3 7/8" x 3 5/8" x 3/16"



Rectangle Extrusion

Part #	Description
#100-0001	1/4" x 3/8"
#100-0024	1/4" x 1/2"
#100-0025	1/2" x 3/8"
#100-0026	5/16" x 7/16"
#100-0027	5/16" x 1/2"
#100-0028	1/8" x 1/2"
#100-0029	3/16" x 11/16"
#100-0030	1/4" x 3/4"
#100-0031	1/8" x 3/4"
#100-0002	1/2" x 9/16"

Square Extrusion

Part #	Description
#100-0003	5/16"
#100-0021	1/4"
#100-0022	3/8"
#100-0004	7/16"
#100-0023	1/2"

Diamond Extrusion

Part #	Description
#100-0006	11/32"
#100-0019	1/4"
#100-0015	3/8"
#100-0005	5/16"

Sponge Extrusions w/ 3M PSA

Part #	Description
#100-0061	1/4" x 3/8"
#100-0062	1/4" x 1/2"
#100-0064	1/4" x 1"
#100-0066	1/4" x 3/8"
#100-0081	1/2" x 3/8"
#100-0085	1/4" x 3/4"
#100-0086	1/4" x 7/8"
#100-0087	3/8" x 7/8"
#100-0088	3/8" x 3/8"
#100-0090	1/4" x 1/4"
#100-0091	1/4" x 5/8"
#100-0092	1" x 3/8"

Round Extrusion

Part #	Description
#100-0011	3/8"
#100-0012	1/2"
#100-0016	1/4"
#100-0017	3/16"
#100-0013	5/16"
#100-0014	7/16"
#100-0018	9/16"

Custom Shape Extrusions

Part #	Description
#100-0008	Westinghouse
#100-0020	G.E. Ins. Lid
#100-0007	Howard
#100-0009	Cooper

Sponge Extrusions

Part #	Description
#100-0032	1/4" x 1/4"
#100-0033	3/8" x 3/8"
#100-0034	3/16" x 1/4"



Recloser Parts



FGS
AN EIS COMPANY



L Coils

Part #	Description
#PGS15L	Replacement for KA67L15
#PGS25L	Replacement for KA67L25
#PGS35L	Replacement for KA67L35
#PGS50L	Replacement for KA67L50
#PGSOL	Replacement for KA67L70
#PGS100L	Replacement for KA67L100
#PGS140L	Replacement for KA67L140
#PGS200L	Replacement for KA67L200
#PGS280L	Replacement for KA67L280



H-4H Coils

Part #	Description
#PGS10H	Replacement for KA83H10
#PGS15H	Replacement for KA83H15
#PGS25H	Replacement for KA83H25
#PGS35H	Replacement for KA83H35
#PGS50H	Replacement for KA83H50
#PGS70H	Replacement for KA709H70
#PGS100H	Replacement for KA709H100

V4L Coils

Part #	Description
#PGS25V4L	Replacement for KA700V4L25
#PGS35V4L	Replacement for KA700V4L35
#PGS50V4L	Replacement for KA700V4L50
#PGS70V4L	Replacement for KA700V4L70
#PGS100V4L	Replacement for KA700V4L100



E Coils

Part #	Description
#PGS15E	Replacement for KA58E15
#PGS25E	Replacement for KA58E25
#PGS35E	Replacement for KA58E35
#PGS50E	Replacement for KA58E50
#PGS70E	Replacement for KA58E70
#PGS100E	Replacement for KA58E100



Part #	Description
#PGS014CA	Replacement for KA28C014S
#PGS01CA	Replacement for KA28C01S
#PGS03CA	Replacement for KA28C03S
#PGS04CA	Replacement for KA28C04S
#PGS05A	Replacement for KA28C05S



Part #PGS25H4
Replacement for KA25H4



Part #KP122NR
NR Sleet Hood Cover



Part #PGSHH
Replacement for KP309H

Part #PGSHL
Replacement for KP292L

Part #PGSHOL
Replacement for KP117L



Part #PGS9E1C
E Contact Rod
Replacement for KA139E1

Part #PGS32LC
L Moveable Contact
Replacement for KA32L

Part #PGS182E1C
EF2 Contact Rod
Replacement for KA181E1

Part #PGS112E4
E4 Moving Contact




Part #PGSBCL
Replacement for KP111R

Part #PGSBCS
Replacement for KP121L



Part #	Description
#PGSLEK	Replacement for KA719E
#PGSH4HK	Replacement for KA734H
#PGSH3K	Replacement for KA745H3
#PGSR1K	Replacement for KA907R1
#PGSR5K	Replacement for KA907R5



A. Part #PGSLB
Replacement for KP1L


B. Part #PGSHB
Replacement for KP328H

C. Part #PGS4HB
Replacement for KP130VR

D. Part #PGSEB
Replacement for KP1E

E. Part #PGSRB
Replacement for KP1578R

F. Part #PGSWB
Replacement for KP1110R




Part #PGSLCCP
Replacement for KA743ME1 (Male)


Part #PGSLCCS
Replacement for KA743ME2 (Female)



Part #PGS230E
Replacement for KP230E



Part #PGS123L
Replacement for KP123L



Part #PGS112H4
Replacement for KP112H4



Part #400-0053
1" S/S Pipe Plug



Part #PGSLCC90P



Part #200-0014
17/32" S/S 3/16" Washer



Part #200-0015
13/32" S/S 3/16" Washer



Part #200-0019
5/8" Lockwasher S/S



Part #200-0021
1/2" X 1" S/S Bolt



Part #200-0025
1/2" x 3 1/4" S/S Bolt



Part #200-0029
3/8" x 2" S/S Bolt



Part #200-0030
3/8" X 2 1/4" S/S Bolt




Part #200-0031
3/8" x 3" S/S Bolt



Part #200-0035
1/2" Lifting Lug KA764H



Part #200-0036
S/S Strap KP464H




Part #200-0037
3 Phase S/S Lift Lug KA884R



Part #200-00432
5/8" X 1 1/2" S/S Bolt



Part #200-0046
3/8" S/S Pin Nut



Part #200-0005
1/2" S/S Pin Nut



Part #200-0047
3/8" S/S Threaded Rod



Part #200-0052
1/2" S/S Pipe Plug



Part #200-0032
Small S/S Bushing Clamp



Part #200-0033
Large S/S Bushing Clamp



Part #PGS000A3
Replacement for KP200A3



Part #PGS51H
Replacement for KP151H



Part #PGS472H
Replacement for KP472H



Part #PGS171E
Replacement for KA171E



Part #PGS15L1
Replacement for KA715L1



Part #PGS60G
Replacement for KP2090A60



Part #PGS55G
Replacement for KP2090A55



Part #PGS23G
Replacement for KP2090A23



Part #PGS6G
Replacement for KP2090A6



Part #PGS28G
Replacement for KP2090A28



Part #PGS29G
Replacement for KP2090A29



Part #PGS66G
Replacement for KP2090A66



Part #PGS7G
Replacement for KP2090A7



Part #PGS25G
Replacement for KP2090A25



Part #PGS12HG
Replacement for KP2103A12



Part #PGSA4HG
Replacement for KP2103A4



Part #PGSA7HG
Replacement for KP2103A7



Part #PGSA8HG
Replacement for KP2103A8



Part #PGSA9HG
Replacement for KP2103A9



Part #PGS21G
Replacement for KP2090A21



Part #PGS24G
Replacement for KP2090A24



Part #PGS31G
Replacement for KP2090A31



Part #PGS40G
Replacement for KP2090A40



Part #PGS50G
Replacement for KP2090A50



Part #PGS51G
Replacement for KP2090A51



Part #PGS47G
Replacement for KP2090A47



Part #PGS7G
Replacement for KP2090A7




Part #PGS2G
Replacement for KP2090A12




Part #PGSH4TPG
Replacement for KP113H4



Part #PGS222L
Replacement for KP222L



Part #PGSHG
Replacement for KP3H



Part #PGS176H4
Replacement for KP176H4



Part #PGS389R
Replacement for KP389R



Part #PGS70G
Replacement for KP2090A7




Part #PGS611R
Replacement for KP611R



Part #PGS71G
Replacement for KP2090A71




Part #700-0001
Vacuum Decal




Part #700-0065
Warning Decal for Reclosers




Part #700-0088
Warning Decal




Part #P212-003
 Recloser Type "L" Name Plate




Part #700-0077
 Recloser Type "4E" Name Plate




Part #700-0078
 Recloser Type "E" Name Plate




Part #700-0079
 Recloser Type "V4L" Name Plate



Part #P212-001
 Recloser Type "H" Name Plate




Part #P212-002
 Recloser Type "4H" Name Plate



Part #700-0075
 Recloser Type "V4E" Name Plate




Part #700-0072
 Opening Sequence Tag




Recloser "H" Coil Tags

Part #	Description
# 700-0061	10 AMP
# 700-0053	15 AMP
# 700-0049	25 AMP
# 700-0048	35 AMP
# 700-0050	50 AMP
# 700-0051	70 AMP
# 700-0063	100 AMP



Recloser "4H" Coil Tags

Part #	Description
# 700-0054	10 AMP
# 700-0062	15 AMP
# 700-0055	25 AMP
# 700-0056	35 AMP
# 700-0057	50 AMP
# 700-0060	70 AMP
# 700-0058	100 AMP



Recloser "L" Coil Tags


Part #	Description
# 700-0066	25 AMP
# 700-0067	35 AMP
# 700-0068	50 AMP
# 700-0069	70 AMP
# 700-0070	100 AMP



Regulator Parts



FGS
AN EIS COMPANY



Part # PG6032-002
1 1/2 NPT Brass Pipe Nipple



Part # DV1016
1/2 Heavy Duty Valve



Part # V-171
1 Globe Valve



Part # V-173
1 Globe Valve w/Sampler



Part # V-174
2 Globe Valve w/Sampler



Part #300-0040
Siemens Sightglass



Part #300-0041
Siemens Sightglass Gasket



Part #V-806
1 Sight Gauge with Ball



Part #082-001-01
Cooper Position Indicator



Part #008-60R
GE Position Indicator



Part #009-60BE
Position Indicator



Part #009-60CU
Position Indicator



Part #V-179
3/8 Sampler w/Chain



Part #V-178
1/2 Sampler w/Cap



Part #BHDSF40-010TP
1 1/8 4 Hole Aerial Log



Part #0810
U-Bolt Assembly



Part # 614-1
Type A Bracket



Part # 614-2
Oval Bracket



Part # 614-3
Type D Bracket

Position Indicator Glass

Part #	Description
#300-0311	6 1/4" x 1/8"
#300-0326	7 3/16" x 3/16"
#300-0324	7 1/8" x 3/16"
#300-0256	7 3/8" x 3/16"
#300-0327	6 1/2" x 1/8"





Arrester Brackets

Part #	Description	Size
#200-0067	Long Arresto Bracket S/S	9" x 2 3/4"
#200-0253	Cooper Arrester Bracket S/S	5 1/2" x 3"
#200-0071	Short Arrester Bracket S/S	6 1/2" x 2 3/4"



Capacitors

Part #	Description
#05-10-440	5 MF Capacitors
#06-10-440	6 MF Capacitors
#7.5-10-440	7.5 MF Capacitors
#10-10-440	10 MF Capacitors
#15-10-440	15 MF Capacitors
#20-10-440	20 MF Capacitors
#25-10-440	25 MF Capacitors
#30-10-440	30 MF Capacitors
#40-10-440	40 MF Capacitors
#50-10-440	50 MF Capacitors



Part # M-288-4
Rubber Boot



Part #UNS03030C0B0A1A
3 KV Regulator Arrester



Part #201-020-08T
5 psi PRV




Part #PGS-140-KIT
S/S J Bolt Assembly



Part #MH004-002
Adapter Stud for U Bolt



Part #MH0044-001
Threaded Adapter Stud for U Bolt



Part #0808-1
2 Hole Terminal Connector



Part #01-11-5422
Arrester Bracket for Regulator



Part #200-0303
Control Box



Part #01-11-5425
Brass Regulator
Mounting Bracket



Substation Parts



FGS
AN EIS COMPANY



Part #	Description
A. Part #201-020-01T	10 PSI Fine Thread
B. Part #201-021-01	10 PSI Coarse Thread
C. Part #201-020-08T	5 PSI



D. Part #202-030-01T	10 PSI
E. Part #202-032-01N	10 PSI Black Cap
F. Part # 202-037-01	10 PSI Pipe Thread 1/2 x 14
G. Part #202-032-03	
H. Part #202-014-02N	
I. Part #202-035-01	10 PSI Gray Cap



Part #ADP-603-1
Pressure Relief Valve Kit



Part #207-60-3
Semaphore Yellow



Part #LPRD00-00199161
10 PSI PRD w/Switch
and Cord



Part #167-224-03
5" Temp Gauge w/2 Contacts
0°C-120°C and Cable



Part #415-P73C
Alarm Switch for PRD



Part #415-P73E
Alarm Switch for PRD
48" Cable



Part #205-001-01
10 PSI 1 1/4" Thread



Part #LPRD00-00021520
5 PSI PRD w/Gasket
& Semaphore

Part #LPRD00-00032082
10 PSI PRD w/Gasket
& Semaphore



Part #208-60E
Part #208-60N
Part #208-60P
Part #208-60U
Part #208-60Z
Part #208-002-04



Part #GAS-087-1
Gasket for PRD

Part #LPRD00-00040048
8PSI PRD w/Gasket
& Semaphore



Part 165-207-01
Temp Gauge 0°C-160°C
w/Contact



Part #104-317-01 CS-32361
6" Remote Mount Thermo
Gauge with Cable



Part #167-204-01
5" Direct Mount Thermo
w/2 Contacts



Part #BEZ-613-1
Lens for 167-244-01
Temp Gauge



Part #104-317-01
6" Remote Temp Gauge



Part #150-101-01
Temp Gauge



Part #165-209-01
5" Temp Gauge



Part #251-002-01
Winding Temp Gauge



Part #TR6000-00021812
6" Remote Temp. Gauge




Part #TR6000B00181312
6" Remote Temp. Gauge



Part #104-318-01
6" Winding Temp. Gauge



Part #020-001-01
Liquid Lever Gauge
w/Long Float



Part #020-041-01
Liquid Level Gauge
for Bolt on or Threaded



Part #020-053-01
Liquid Level Gauge Round
Plastic Case



Part #032-35E
3.5" Liquid Level Gauge
w/Contact



Part #035-018-01
3.5" Liquid Level Gauge
w/2 Contacts and Cable



Part #CAS-650-1
Liquid Level Gauge Case



Part #020-550-01
Liquid Level Gauge
For Bolt on or Threaded



Part #026-014-02
6" LL Case



Part #035-030-01 CS-36616
3.5" Liquid Level Gauge



Part #050-35E
10 PSI Pressure Vac Gauge



Part #LLG042-00040829
Liquid Level Gear Drive



Part #035-030-01
3.5" Liquid Level Gauge



Part #CAS-652-4 CS-30029
6" LL Case



Part #LLG042-00016872
6" LLG w/Cable

Part #042-011-01
6" Liquid Level Gauge



Part #008-60R
GE Position Indicator



Part #050-010-01
15 PSI Pressure Vac Gauge



Part #148-018-1
Pressure Vac Gauge
w/Bleeder and Contact
-3/+8



Part #070-35C
10 PSI Pressure Vac
w/Compound Gauge



Part #009-60BE
Position Indicator



Part #351-2A
Pressure Vac Bleeder



Part #009-60CU
Position Indicator



Part #082-001-01
Cooper Position Indicator



Part #900-009-03
RPRR Horizontal Mount
for Oil



Part #GAS-022-1
Position Indicator
Glass Gasket



Part #141-005-01
Gauge Switch Manifold

Part #141-005-02
Gauge Switch Manifold



Part #VNT-602-1
Vertical Vent for RPRR



Part #VNT-601-1
Horizontal Vent for RPRR



Part #910-010-03
RPRR for Gas w/Vent




Part #910-006-03
RPRR for Gas/V



Part #COL-606-1
Reset Coil



Part #TRA-001-1
Auto Transformer




Part #250-42-5
Well



Part #165-50-3
Well



Part #167-50-3D
Well



Part #ADP-115-1
Adapter



Part #ADP-610-1
Adapter Plate Flange



Part #146-2 PT1
Pressure Switch 8



Part #146-3 PT2
Vacuum Switch 3 PSI



Part #909-300-01
AC-DC Seal in Relay



Part #909-200-01
Seal in Relay



**Part #118P-U-K-02
& KIT 020-1**
Universal Relay



Part #CON-606-2
72" Cable
Part #CON-603-10
96" Cable 16/3
Part #CON-605-7
96" Cable 16/5
Part #CON-606-10
96" Cable 16/6



Part #CON-603-12
72" Cable 16/3



Part #CON-603-25
144" Cable 16/3



Part #CON-608-9
72" Cable 16/8



Part #CON-609-1 CS-41441
48" Connector Assembly



Part #CON-630-6
72" Cable RPRR



Part #CON-660-2
72" Cable 16/6



Part #CON-661-2
72" Cable 9 Pin



Part #CON000-00193831
72" Cable 2 Pin



Part #CON-630-9
120" Cable 16/3



Part #CON-659-7
60" Cable 16/3



Part #CON-659-2
72" Cable 16/3



Part #COL-610-1
Heater Coil



Part #COL-609-1
Heater Coil



Totes



(Above)
Part #500-0003
Envirotemp FR3 Dielec Fluid, Totes,
330/gal

(Left)
Part #500-0001
Mineral Oil, Totes, 275/gal

Drums



(Above)
Part #500-0004
Envirotemp FR3 Dielec Fluid, Drums,
55/gal

(Right)
Part #500-0002
Mineral Oil, Drums, 55/gal





P.O.Box 1871 . Brandon, MS 39043

769-235-6665

