


# 7320 BECBM


SKF Explorer

## Dimensions

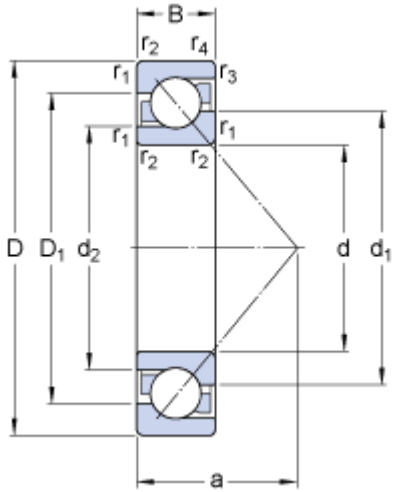

d	3.937	in
D	8.465	in
B	1.85	in
d <sub>1</sub>	≈ 5.689	in
d <sub>2</sub>	≈ 4.743	in
D <sub>1</sub>	≈ 6.841	in
a	3.543	in
r <sub>1,2</sub>	min. 0.118	in
r <sub>3,4</sub>	min. 0.0433	in

## Abutment dimensions

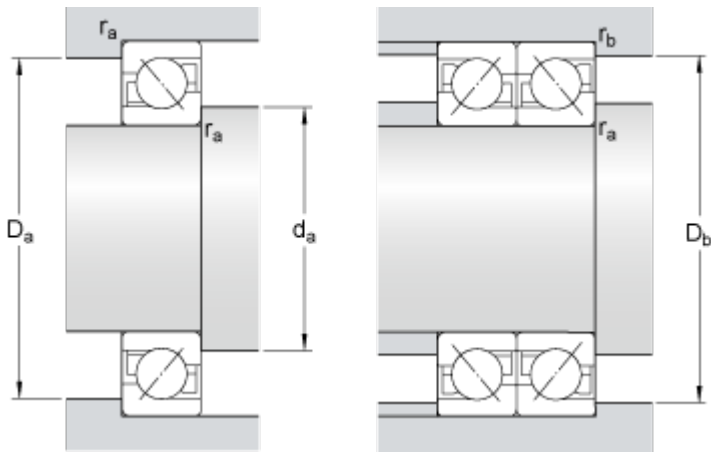

d <sub>a</sub>	min. 4.488	in
D <sub>a</sub>	max. 7.913	in
D <sub>b</sub>	max. 8.189	in
r <sub>a</sub>	max. 0.0984	in
r <sub>b</sub>	max. 0.0394	in

## Calculation data

Basic dynamic load rating	C	48558.732	lbf
Basic static load rating	C <sub>0</sub>	46760.26	lbf
Fatigue load limit	P <sub>u</sub>	1562.422	lbf
Reference speed		4000	r/min
Limiting speed		4000	r/min
Calculation factor	k <sub>r</sub>	0.1	
Calculation factor	k <sub>a</sub>	1.6	
Calculation factor	e	1.14	

## Single bearing or bearing pair arranged in tandem

Calculation factor	X	0.35	
Calculation factor	Y <sub>0</sub>	0.26	

Calculation factor	$Y_2$	0.57
<b>Bearing pair arranged back-to-back or face-to-face</b>		
Calculation factor	X	0.57
Calculation factor	$Y_0$	0.52
Calculation factor	$Y_1$	0.55
Calculation factor	$Y_2$	0.93

## Mass

---

Mass bearing	16.535	lb
--------------	--------	----

---