


# 7313 BECBM


SKF Explorer

## Dimensions

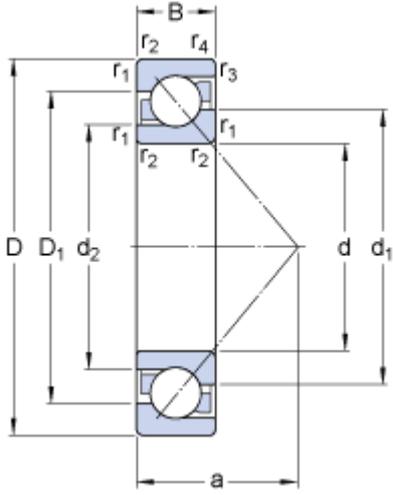

d	2.559	in
D	5.512	in
B	1.299	in
d <sub>1</sub>	≈ 3.707	in
d <sub>2</sub>	≈ 3.089	in
D <sub>1</sub>	≈ 4.443	in
a	2.362	in
r <sub>1,2</sub>	min. 0.0827	in
r <sub>3,4</sub>	min. 0.0433	in

## Abutment dimensions

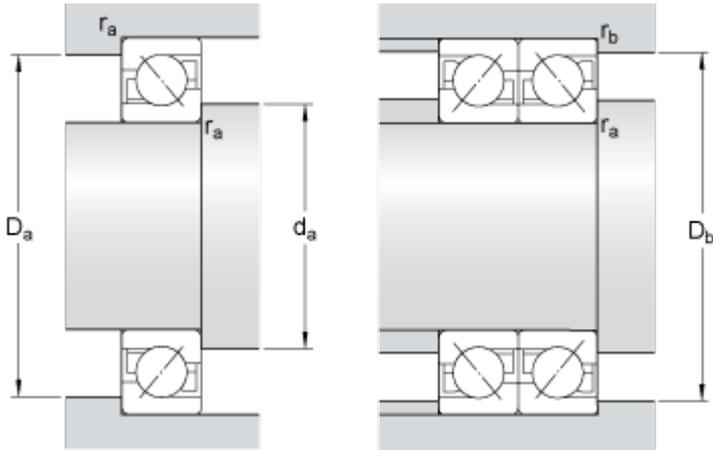

d <sub>a</sub>	min. 3.031	in
D <sub>a</sub>	max. 5.039	in
D <sub>b</sub>	max. 5.236	in
r <sub>a</sub>	max. 0.0787	in
r <sub>b</sub>	max. 0.0394	in

## Calculation data

Basic dynamic load rating	C	26077.837	lbf
Basic static load rating	C <sub>0</sub>	19445.974	lbf
Fatigue load limit	P <sub>u</sub>	820.553	lbf
Reference speed		6300	r/min
Limiting speed		6300	r/min
Calculation factor	k <sub>r</sub>	0.1	
Calculation factor	k <sub>a</sub>	1.6	
Calculation factor	e	1.14	

## Single bearing or bearing pair arranged in tandem

Calculation factor	X	0.35	
Calculation factor	Y <sub>0</sub>	0.26	

Calculation factor	$Y_2$	0.57
<b>Bearing pair arranged back-to-back or face-to-face</b>		
Calculation factor	X	0.57
Calculation factor	$Y_0$	0.52
Calculation factor	$Y_1$	0.55
Calculation factor	$Y_2$	0.93

## Mass

---

Mass bearing		4.74	lb
--------------	--	------	----

---