


7217 BECBM


SKF Explorer

Dimensions

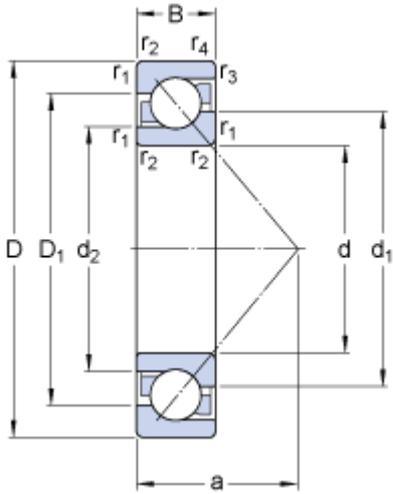

d	3.346	in
D	5.906	in
B	1.102	in
d ₁	≈ 4.335	in
d ₂	≈ 3.82	in
D ₁	≈ 4.988	in
a	2.48	in
r _{1,2}	min. 0.0787	in
r _{3,4}	min. 0.0394	in

Abutment dimensions

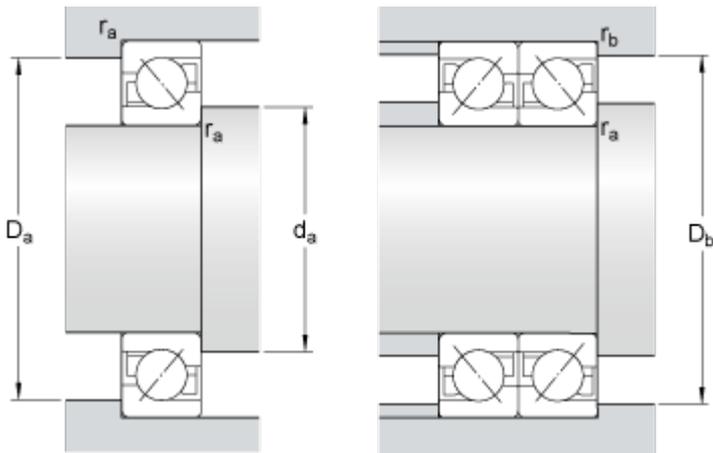

d _a	min. 3.78	in
D _a	max. 5.472	in
D _b	max. 5.669	in
r _a	max. 0.0787	in
r _b	max. 0.0394	in

Calculation data

Basic dynamic load rating	C	22930.512	lbf
Basic static load rating	C ₀	20232.805	lbf
Fatigue load limit	P _u	798.072	lbf
Reference speed		5300	r/min
Limiting speed		5300	r/min
Calculation factor	k _r	0.095	
Calculation factor	k _a	1.4	
Calculation factor	e	1.14	

Single bearing or bearing pair arranged in tandem

Calculation factor	X	0.35	
Calculation factor	Y ₀	0.26	

Calculation factor	Y_2	0.57
Bearing pair arranged back-to-back or face-to-face		
Calculation factor	X	0.57
Calculation factor	Y_0	0.52
Calculation factor	Y_1	0.55
Calculation factor	Y_2	0.93

Mass

Mass bearing		4.079	lb
--------------	--	-------	----
